



## 211 SERIES

### Swing aluminium shutters

The range of TAOS® aluminium profiles is designed for swing shutters with 1, 2, 3 or 4 leaves. This range is suitable for both newbuild and renovation, with easy-to-use accessories.

#### MODELS

- Solid shutters with thermal bridge break slats
- Solid, horizontal or vertical slats
- Board and batten shutters
- Straight or curved
- Shading louvered shutters
- Open louvered shutters
- Adjustable louvered shutters
- Shutters with opening flaps

#### OPENING SECTIONS

Aluminium tubing 62 x 33 mm section for louvered or mixed shutters, 27 mm for solid shutters

#### ASSEMBLY

The frame and the opening panels are fixed with clawed or stubbed corner fittings. All these parts are in aluminium or stainless steel.


#### METALWORK

- The shutter is hung from aluminium strap hinges, the crossbar serving as a hinge support for "board and batten" shutters. More hinges are added according to the size and weight of the shutter
- All fixings are aluminium or stainless steel

MADE IN FRANCE 

#### FEATURES

- Very large choice of styles
- An opening flap can be integrated in a shutter leaf
- Invisible crossbar fixings
- Stylized profiles and moulded parts
- Large choice of accessories
- Available in all Profils Systèmes' exclusive colours : Terra Cigala®, Maohé®, Eclats Métalliques®, Profils Color®, Terre de Matières®
- Colour shades guaranteed up to 25 years\*

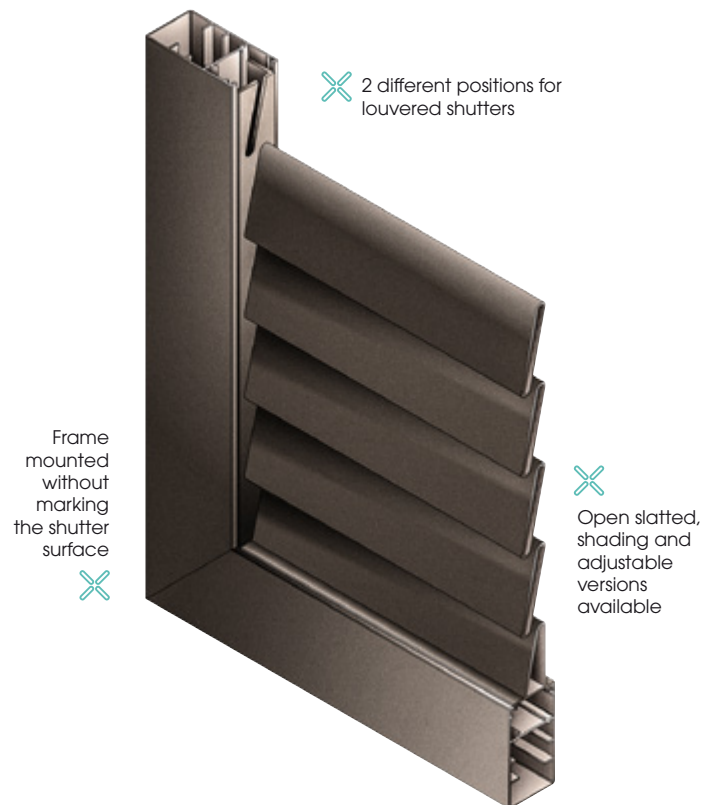

#### LOCKING

The shutters are locked by a bolt lock bar anchored above and below.  
A locking casement stay ensures ventilation with security.

#### MAX DIMENSIONS (2 LEAVES)

H2500 x W2000 mm (max. load per leaf: 50kg)

**Profils**  
SYSTEMES

*Choose your profile*



# 211 SERIES

## Sliding aluminium shutters

The TAOS® range of aluminium profiles is designed for the fabrication of sliding aluminium shutters. This range of sliding shutters can also be incorporated into a Wallis&Outdoor® pergola. Extra options: motorisation and a 25 mm solid insulated slat.



### STRAIGHT CUT DESIGN

#### MODELS

- Solid with vertical slats
- Solid with thermal bridge break
- Shading louvers
- Open louvers
- Adjustable louvers
- Multi directional louvers - height 100mm

#### OPENING SECTIONS

- 2 Systems : - Edging  
- Straight cut
- Tubular: - 62 x 33mm for louvered or mixed shutters  
- Section variation for 100mm: upright 66 x 33mm (only for straight-cut monorail)

#### ASSEMBLY

The opening panels are retained with barbed fixings and adhesive. All fixings are stainless steel or aluminium. All fittings and mounting brackets are invisible

#### OPTIONS

- Operation by remote control or switch
- Compatible with TOR, GTC, GTB or Domotique operating systems
- Automatic stop to prevent pinched fingers
- Integrated pre-alarm
- Electric locking available

#### FEATURES

- Can be adapted to large-scale openings
- Large choice of models
- Motorization available
- Two types of roller guide to support 40 or 80Kg / leaf
- Fixings invisible on shutter surface
- Available in all Profils Systèmes' exclusive colours : Terra Cigala®, Maohé®, Eclats Métalliques®, Profils Color®, Terre de Matières®
- Colour shades guaranteed up to 25 years\*



Sliding shutters available in solid, louvered or mixed versions, with the option of motorization

#### LOCKING

The shutters can be locked by either :

- a bolt
- a 2 or 3-point lock

#### MAX DIMENSIONS

- **H2500 x W2000mm** or **H3000 x W1500mm** with roller guide (max. load 80 kg)
- **H2300 x W1000mm** with roller guide (max. load 40 kg)
- Large dimensions **up to 8 metres : 4 leaves, 2 rails**

Powder coating guaranteed

10 YEARS 25 YEARS

Label\* QUALICONT Licence n°549

INDOOR AIR EMISSIONS A+

NF

\*This guarantee is only available to professional retailers who are clients of Profils Systèmes, see terms and conditions of sale at [www.profiles-systemes.com](http://www.profiles-systemes.com)

[www.profiles-systemes.com](http://www.profiles-systemes.com)

Parc Activités Massane - 10 rue Alfred Sauvy  
34 670 Baillargues - France / Tél : +33 4 67 87 67 87  
A Corialis affiliated company

